


# **Briton**

## EL3000 Series



x


#### **EN Certified Mortise Lockcases**

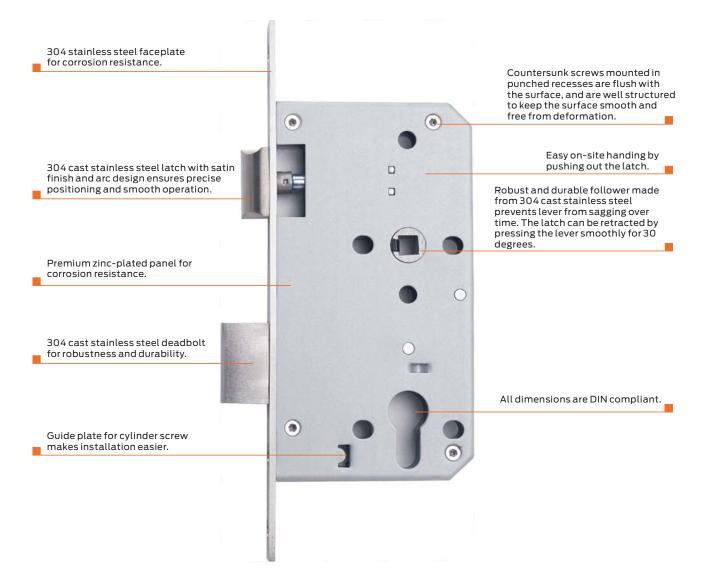


#### EL3020 Sash Lockcase

Standards & Testing	Certified to EN12209
	Fire tested to China Certification Center for Fire Products (CCCF) standards
	Tested to China National Standard GB12955, "Fire resistant doorsets", for 90 minutes
	DIN18251-compliant lockcase dimensions
	Locks tested:
	Latchbolt durability - 200,000 cycles
	Deadbolt durability - 50,000 cycles
	Corrosion resistance - 96h salt spray test
Specifications	
Functions	Dead lock, sash lock, bathroom lock, latch, night latch, ball lock
Dimensions	Case dimensions (LxWxD): 165mmx89mmx15mm
	Faceplate dimensions: 235mmx <b>20mm</b> x3mm; 235mmx <b>24mm</b> x3mm
	Backset: EL3000: <b>60mm</b> ; EL3000-b55: <b>55mm</b>
	Follower to cylinder centres: 72mm
	Dead throw: 12mm
	Latch throw: 20mm
	Door thickness: 40-50mm(standard) or 40-60mm(optional)
Materials & Features	Deadbolt: 304 cast stainless steel
	Latchbolt : 304 cast stainless steel
	Faceplate: 304 stainless steel (square and round optional)
	Strike plate: 304 stainless steel, with preformed lip, nonhanded

#### Finishes

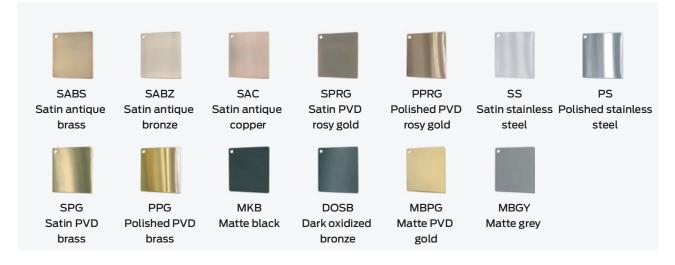

## **EN Certified Mortise Lockcases**

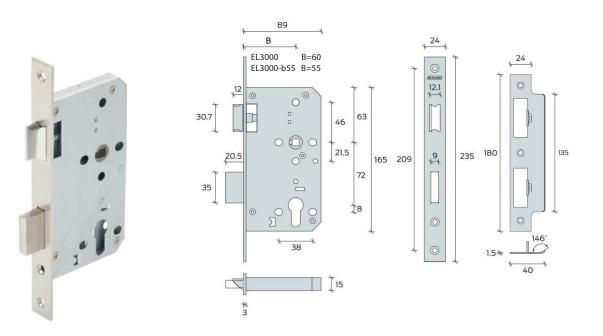

#### EL3060/EL3060-b55 Panic Exit Lock

Latchbolt retracted by both levers and cylinder. Deadbolt thrown or retracted by inside lever and cylinder. Lock functions on both sides are field reversible.

#### **EN Certified Mortise Lockcases**

#### **Order Specifications - Lockcase**

